

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.



**THIS PAGE BLANK (USPTO)**



(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 479 065 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 91116025.7

(51) Int. Cl.<sup>5</sup>: B60C 9/22, B60C 9/20

(22) Date of filing: 20.09.91

(30) Priority: 01.10.90 US 590999


Akron, Ohio 44316-0001(US)

(43) Date of publication of application:  
08.04.92 Bulletin 92/15(72) Inventor: Navaux, Stanley  
49, Chaussee d'Arlon  
B-6650 Bastogne(BE)(34) Designated Contracting States:  
DE ES FR GB IT(71) Applicant: THE GOODYEAR TIRE & RUBBER  
COMPANY  
1144 East Market Street(74) Representative: Leitz, Paul  
Goodyear Technical Center, Patent  
Department  
L-7750 Colmar-Berg(LU)

(54) Belt structure for a radial pneumatic tire.

(57) A radial ply pneumatic tire (10) has carcass plies (13-15) reinforced by textile cords and folded axially around a pair of axially spaced bead cores (11,12) and a belt structure (30; 330) comprising at least two layers (32-34; 332-334) made of spirally wound strips. The spirally wound strips are reinforced by

cords consisting at least in part of aramid yarns. Between each pair of neighboring layers (332-334) of spirally wound strips, a ply (340,341) reinforced by textile cords is interposed. Such a belt structure is more specifically suitable for an aircraft tire.

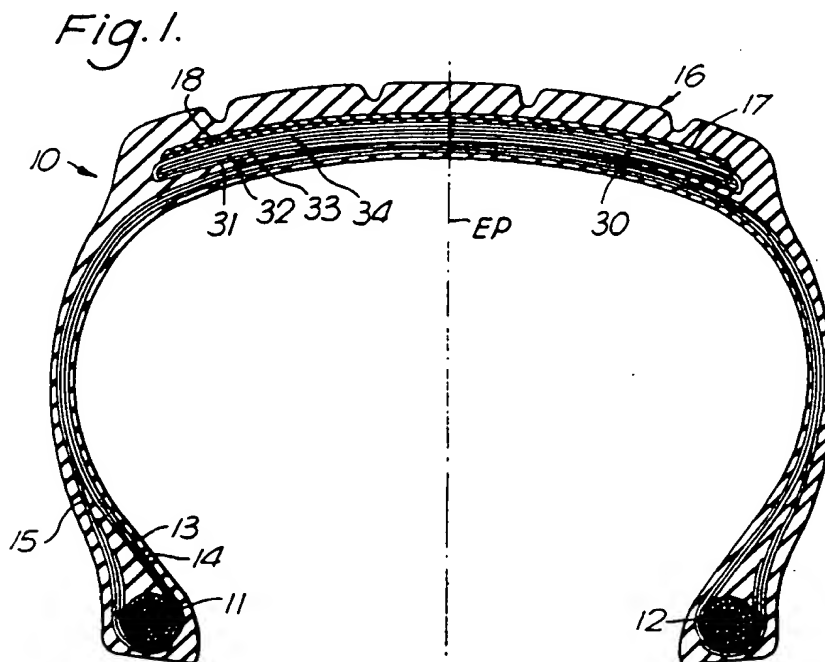



## Background of the Invention

The present invention relates to a belt structure for a pneumatic radial tire and more specifically for a tire suitable for use on aircraft.

It is generally recognized in the tire art that tires suitable for use on aircraft must be capable of operating under conditions of very high speeds and large loads as compared to tires used on automobiles, busses, trucks or similar earthbound vehicles. It is understood, however, that tires for such earthbound vehicles may advantageously be made in accordance with the broad aspects of the invention described herein. As used herein and in the claims, a tire is "suitable for use on an aircraft" if the tire is of a size and load range, or ply rating, specified in either the YEARBOOK OF THE TIRE AND RIM ASSOCIATION, or the YEARBOOK OF THE EUROPEAN TYRE AND RIM TECHNICAL ORGANIZATION, for the year in which the tire is manufactured, or in the current U.S.A. military specification "MIL-T-5041".

It is known in the tire art that a radial tire having a folded belt ply in its belt structure, shows good high speed properties. In order to enhance the high speed properties of a tire, such belt plies are usually folded around a plurality of unfolded belt plies. The folded belt ply effectively reduces the potential for destruction of the belt which can be caused by a separation of the unfolded belt ends from the surrounding rubber.

Finite element analysis shows that if the reinforcing cords of these unfolded belt plies are parallel to the equatorial plane of the tire, a minimum shear stress between the different plies is obtained. Such an orientation of the reinforcing cords is also obtained by replacing the unfolded layers by spirally wound strips. Layers of spirally wound strips lead in addition to a relatively high belt strength for a relatively low number of belt plies.

It is further known that in view of its high modulus and dimensional stability, aramid is particularly advantageous as reinforcing element in high speed tires. As used herein, "aramid" and "aromatic polyamide" are both understood to mean a manufactured fiber in which the fiber forming substance is generally recognized as a long chain synthetic aromatic polyamide in which at least 85% of the amide linkages are attached directly to the two aromatic rings. Representative of an aramid or aromatic polyamide is a poly (p-phenyleneterephthalamide). It is to be noted that aramid has up to now been mostly disregarded as reinforcement of the belt plies when the reinforcing cords make an angle less than 10° to the equatorial plane of the tire, this is due to the fact that aramid lacks the expansion properties required in the shaping and

vulcanizing step of the tire.

It is an object of the present invention to provide a belt for a radial tire particularly suitable for use on aircraft and having excellent dimensional stability, a good tread life as well as outstanding high-speed properties.

It is a further object of the present invention to create a tire belt comprising reinforcing cords consisting at least in part of aramid.

## Summary of the Invention

There is provided in accordance with a first aspect of the present invention, a belt structure for a radial pneumatic tire, comprising:

- (a) at least two layers made of spirally wound strips, oriented at about 0° to 5° with respect to the equatorial plane of the tire and extending substantially about the axial width of the belt structure, the spirally wound strips being reinforced by cords consisting at least in part of aramid yarns; and
- (b) a ply interposed between each pair of neighboring layers of spirally wound strips, extending over substantially the same width as said layers the ply is interposed, said ply being reinforced with textile cords.

There is provided in accordance with another aspect of the present invention, a pneumatic tire having a pair of substantially inextensible annular bead cores which are axially spaced apart with at least two carcass plies extending between the bead cores, each of the carcass plies comprising a plurality of reinforcement cords oriented at 75° to 90° with respect to the equatorial plane of the tire and at least one belt structure comprising

- (a) at least two layers made of spirally wound strips, oriented at 0° to 5° with respect to the equatorial plane of the tire and extending substantially about the axial width of the belt structure, the spirally wound strips being reinforced by cords consisting at least in part of aramid yarns; and
- (b) a ply interposed between each pair of neighboring layers of spirally wound strips, extending over substantially the same width as said layers the ply is interposed, said ply being reinforced with textile cords.

To acquaint persons skilled in the art with the principles of the invention, certain presently preferred embodiments illustrative of the best mode now contemplated for the practice of the invention are described herein, making reference to the attached drawings forming part of the specification.

## Brief Description of the Drawings

Fig. 1 is a cross-sectional view of a radial air-



craft tire, taken in a plane that contains the axis of rotation of the tire;

Fig. 2 is an enlarged cross-sectional view of a belt structure according to the prior art;

Fig. 3 is an enlarged cross-sectional view of a belt structure according to a first embodiment of the invention; and

Figs. 4 to 7 are enlarged cross-sectional views of alternate embodiments of belts according to the invention.

### Detailed Description of the Invention

With reference to Fig. 1, an aircraft tire 10 of size 25.5x8.0 R 14 is illustrated which has a pair of substantially inextensible annular bead cores 11,12 which are axially spaced apart with carcass plies 13,14,15 extending between the bead cores. As used herein and in the claims, the terms "axial" and "axially" refer to directions which are parallel to the axis of rotation of a tire, the terms "lateral" and "laterally" are understood to refer to directions going from one sidewall of a tire towards the other sidewall of a tire, and the terms "radial" and "radially" refer to directions that are radially toward or away from the axis of rotation of a tire.

Each of the carcass plies 13,14,15 comprises a plurality of reinforcing cords oriented at 75° to 90°, preferably 80° to 89°, with respect to an equatorial plane (EP) of the tire. The "equatorial plane" of a tire is a plane that is perpendicular to the axis of rotation of the tire and passes through the center of the tire tread. "Tread" means that portion of the tire that comes into contact with the road when the tire is inflated to its nominal pressure and subjected to its rated load.

The carcass comprises two turn-up carcass plies 13,14 and one turn-down carcass ply 15. Each of the turn-up carcass plies 13,14 is folded radially and axially outwardly about each of the bead cores 11,12 and the turn-down carcass ply 15 is folded at least partially radially and axially inwardly about each of the bead cores 11,12 and the turn-up carcass plies 13,14.

It is preferred that the orientation of the reinforcing cords in each carcass ply, or pair of carcass plies, is nearer to 90° with respect to the equatorial plane than the orientation of the reinforcing cords of the radially next innermost ply, or pair of carcass plies, and the included angles between the angles of radially adjacent carcass plies should not be greater than 10°, and preferably not greater than 4°. For example, the outermost ply may be 90°, the adjacent ply may be 84°, and the innermost ply may be 74°. For details about the choice of ply angles, reference is hereby made to commonly owned US patent No. 4,832,103.

In the illustrated embodiment, the reinforcing

cords of all of the carcass plies 13,14,15 can be substantially the same and each comprise a monofilament of 4,000 denier nylon. A monofilament is by definition a cord consisting of one filament. The monofilaments can have any cross-section, an oval or flattened cross-section is however preferred. The monofilaments in each carcass ply are preferably disposed with a minimum density of 16 EPI (ends per inch) in order to yield the desired mechanical characteristics of the tire carcass. Further details about a tire carcass including nylon monofilaments can be found in commonly owned patent application serial No. 345,925 filed on May 1, 1989.

It is understood that the particular carcass structure illustrated in Fig. 1 and described herein is merely an example used in a possible embodiment of the invention and that a tire designer may employ any number of carcass plies or any reinforcement cords for the carcass plies in accordance with the performance requirements of a particular tire while still practicing the present invention.

The belt structure 30 comprises a belt ply 31 folded around three layers 32-34 formed by the convolutions of textile reinforced spirally wound rubber strips, disposed radially outwardly of the carcass plies 13,14,15 in the crown region of the tire 10. Put another way, each layer 32-34 is comprised of a continuous ribbon-like material, having a width of at least a few mm, preferably of about 15 mm, spirally wound in a plurality of circumferential turns on the tire carcass, in a region underlying the tread. The neighboring turns belonging to the same layer can either have an overlapping or abutting relationship, or be spaced, tailoring thereby the reinforcement potential and versatility of the layers made of the spirally wound strips to the reinforcement needs of the different parts of the crown area; the spirals in the shoulders of the tire, submitted to important stresses at high speed, can have for instance an overlapping relationship whereas the spirals in the center of the tire can be spaced by a few mm.

The folded belt ply 31 is reinforced with parallel cords oriented at 12° to 20° with respect to the equatorial plane EP of the tire. Each cord is comprised of two or more yarns that have been twisted together. A yarn is constructed of filaments, i. e. fibers of an indefinite or extreme length of the same base material.

A cord suitable to implement the invention comprises at least two yarns each of which consists only of aramid filaments and a single core yarn which consists only of filaments selected from the group consisting of polyamides having a structure which is at least partly oriented and polyesters having a structure which is at least partly oriented. The aramid yarns are adjacent to one another and



twisted about the core yarn to manufacture the composite cord, but the aramid yarns are not twisted about one another. In a preferred embodiment the core yarn consists of at least one filament of at least partly oriented nylon. The composite cord has a twist multiplier in the range of 5 to 12 and a ratio of twist in the aramid yarns to the twist in the cable in the range of 1.0 to 2.0. The twist multiplier (TM) is determined according to the following equation:

$$TM = 0.0137 \times CT \times \sqrt{CD}$$

wherein

CT is the number of turns per inch (2.54 cm) of cord length; and

CD is the sum of the deniers of the yarns and/or subgroups of the yarns of the cord before any twist is imparted to the yarns or subgroup.

For further details about such composite aramid cords reference is made to commonly owned US patent 4,893,665.

The parallel composite cords can have a linear density of 3,000/3 + 840 denier, comprising three aramid yarns, each yarn having a linear density of 3,000 denier before any twist is imparted thereto and one nylon core yarn having a linear density of 840 denier. The denier of the non-aramid core yarn should preferably be in the range of 5% to 30% of the sum of the deniers of all the aramid yarns. The composite cords have a fabric density of 15 EPI. The spirally wound strips are oriented at 0°-5° with respect to the equatorial plane EP, and extend transversely across substantially the entire axial width delimited by the folded ply 31.

In another embodiment of the invention, the spirally wound strips are reinforced by cords of aramid having a twist multiplier of at least 6 and preferably in the range of 7 to 12 and wherein the yarns comprised in the cords have a twist of at least 10 turns per inch and preferably in the range of 12 to 20 turns per inch. Further details of so-called high twist aramid cords can be found in commonly owned US patent application S.N 391,822 filed on August 10, 1989.

The high twist aramid cords should in a preferred embodiment have a linear density of 3,000/3 denier and have a fabric density of 20 EPI.

In still another embodiment of the invention, the spirally wound strips are reinforced by cords comprising at least two yarns of aramid filaments twisted together with at least one yarn of oriented nylon or polyester. The aramid and the nylon or polyester yarns have different twists. Such cords are described in US patent 4,155,394, the content of which is included herein by reference.

A preferred cord has two yarns of 3,000 denier aramid at a twist of 6.7 turns per inch in a first direction and one yarn of 1890 denier nylon at a

twist of 4.5 turns per inch in the first direction, the three yarns being twisted together into a cord at 6.7 turns per inch, in a second direction opposite to the yarn twist direction. The fabric density is 16 EPI.

Between the ground engaging tread portion 16 and the belt structure 30 are disposed two overlay plies 17,18 reinforced by 840/2 denier nylon cords. The nylon cords have a fabric density of 22 EPI and are parallel to each other in each ply. They are oriented at about 20° for one of the plies and -20° for the other ply with respect to the equatorial plane EP of the tire. It is believed that the overlay plies 17,18 only make a minor contribution to the properties and high-speed performance of the tire; their main function is to protect the belt during retreading operations where they act as a warning layer when the elastomeric material constituting the tire tread is buffed away.

The prior art belt can best be described by reference to Fig. 2, which is an enlarged view of a belt 230 having one belt ply 231 folded around three layers 232,233,234 of spirally wound strips 202,203,204. The lateral ends of the folded belt ply 231 have an overlapping relationship at splice 210. Such an overlap helps towards preventing a tire failure, which could occur on the centermost part of the tread, when the tire is subjected to high speed.

It is to be understood that the drawings of Fig. 2 to Fig. 5, supposed to show cured belts are schematic and serve only an explanatory purpose; in reality, once a tire has been built on the forming drum, the belt shows a curvature following substantially the curvature of the carcass plies as shown on Fig. 6 and 7.

The convolution of the strips 202,203,204, which can have a width ranging between 5 mm to 30 mm and by preference a width of about 15 mm, are wound in the tire building process so as to have an abutting relationship in each of the layers 232,233,234. They make an angle of 0°-5° with the equatorial plane EP of the tire; in an axial cross-section, the spirals of each belt layer define a line.

During the shaping and vulcanizing process of the tire, each spiral tends to move in the belt so as to maintain its length given to it in the tire building process. This is due to the low elongation potential of the aramid reinforcement cords. The radially outer spirals 203,204 thereby displace the neighboring radially inner spirals (203,202 respectively) towards the axis of rotation of the tire.

After the shaping and vulcanizing process, the spirals composing one layer no longer define a layer with a linear cross-section, but the lateral ends of neighboring spirals belonging to the same layer are radially offset. Such a disposition of the spirals in the same layer is detrimental to the



stress distribution in the belt and diminishes the high speed performance of the tire as well as its uniformity.

Referring now to Fig. 3, there is shown a belt 330 made according to the invention. A ply 340,341 reinforced with 840/2 denier nylon cords is interposed between each of the layers 332,333,334. The nylon cords have a density of 22 EPI and are oriented at an angle comprised between 5° and 24° with the equatorial plane EP. The nylon reinforced plies 340,341 have substantially the same width as the layers 332,333,334. It is believed that their contribution to the strength properties of the belt in the tire is low; their main function is to maintain the relative position of the spiral convolutions 302,303,304 during the shaping and vulcanizing process in order to have the spirals of each layer define a line in an axial cross-section. Such a line is however, as suggested by Fig. 3, not a straight line but, as explained above, a line following substantially the curvature of the carcass plies.

The linear density of the nylon cords as well as the fabric density of the cords required in the plies 340,341, depends of course on the linear density of the aramid cords and on their fabric density in the spiral strip. For instance 840/1 denier nylon cords having a fabric density of 30 to 40 EPI, preferably 36 EPI in the ply, are required to maintain a proper disposition of the spirals in the belt when the spirals are reinforced with 3,000/3 denier aramid having a fabric density of 15 EPI.

Between the lateral edges of the respective radially in as well as outermost belt layers 332,334 and the folded belt ply, so-called BENS i.e. breaker edge nylon strips are disposed. They are usually reinforced by 840/2 denier nylon cords having a fabric density of 22 EPI. The nylon cords can form an angle comprised between 5° and 40° with a plane parallel to the equatorial plane EP of the tire and intersecting the cords. The main function of such strips is to reinforce the fold and to work as a transient layer between the folded layer and the unfolded layers.

Referring now to Fig. 4, there is shown an alternate embodiment of the invention featuring four belt layers 432,433,434,435 of spirally wound strips 402,403,404,405, each belt layer 432,433,434,435 extending over the full axial width, delimited by the folded belt ply 431. Plies 440,441, 442 reinforced with nylon cords are interposed between each couple of neighboring aramid reinforced spirally wound layers 432,433,434,435. The main difference with the belt 330 shown in Fig. 3 is that the two radially in BENS (references 321,322) have been replaced by a continuous nylon ply 424 extending over the whole axial width of the belt 430 and folded around the lateral edges of at least one of the radially innermost belt layers

432. The ply 424 is reinforced by 840/1 denier nylon cords having a density of 36 EPI. The nylon cords form an angle ranging between 5° and 25° and by preference of about 10° with the equatorial plane EP of the tire.

The loss of strength resulting from the fact that the folded belt ply 431 has no overlapping lateral ends, is partly compensated in the represented embodiment by the extra strength due to the fourth layer 435 of spirally wound strips.

In the belt 530 shown in Fig. 5, the BENS 320-323 shown in Fig. 3, or the combination of BENS 420,423 and a ply 424 shown in Fig. 4, have been replaced by a continuous nylon reinforced ply 525, folded around the different belt layers 532,533 of spirally wound strips. Such an arrangement is of advantage from a manufacturing point of view as the folded aramid reinforced belt ply 531 and the nylon reinforced ply 525 can enter the tire building process as a combined ply and subsequently be folded jointly around the belt layers 532,533 of spirally wound strips.

Referring now to Fig. 6, there is shown an alternate embodiment of the invention featuring four belt layers 632-635 of spirally wound strips 602-605 located in the crown region of the tire. Plies 640-642 reinforced with nylon cords are interposed between each couple of neighboring aramid reinforced layers 632-635. Another ply 624, reinforced with nylon cords is located between the radially in layer 632 of spirally wound strip 602 and the radially outermost carcass ply 615 and a further ply 625 is located between the radially outermost layer 635 of spirally wound strip 605 and the overlay plies (not shown) which protect the belt during retreading operations. The main function of the plies 624,625 is to protect the end of the aramid cords against disentangling. The nylon reinforced plies 640-642,625 can have different widths; each radially outer ply can for instance have an 5%-10% smaller width than the neighboring radially inner ply. The width of the ply 624 adjacent to the carcass ply, must be at least equal to the width of the radially in layer 632 of the spirally wound strip 602. The different plies 624,625,640-642 are reinforced by 840/1 denier nylon cords having a fabric density of 36 EPI or by 840/2 denier nylon cords having a fabric density of 24 EPI. The nylon cords form an angle ranging between 5° and 25° and by preference form an angle of about 10° with the equatorial plane EP of the tire.

In Fig. 7 there is shown still an alternate embodiment of the invention, featuring four belt layers of spirally wound strips. The main difference with the belt structure shown in Fig. 6 is that there is no single radially in nylon reinforced ply 624, adjacent to the carcass plies 713,715, but instead the embodiment comprises a split ply 721,722 protecting



the ends of the reinforcement cords of the radially in layer 732 of spirally wound strip. Structural features equivalent to those shown on Fig. 6, are identified by the same reference number increased by 100.

Spirally wound, aramid reinforced strips in the belt contribute to provide tires which possess the strength needed to resist extraordinary levels of deflection and high speed (such as is the case for aircraft tires). It is understood however, that the particular reinforcement of the plies interposed between the layers of spirally wound strips described herein, i. e. nylon cords, is merely an example used in a possible embodiment of the invention. The tire designer may choose any textile reinforcement cords having the required high elongation capability at low tension, such as polyester cords. The polyester cords should have a linear density of at least 1,000/2 denier and a fabric density of at least 20 EPI, preferably of about 30 EPI.

While certain representative embodiments have been described for the purpose of illustrating the invention, it will be apparent to those skilled in the art that various changes and modifications may be made therein without departing from the spirit or scope of the invention.

#### Claims

1. A belt structure for a radial pneumatic tire, characterized by
  - (a) at least two layers made of spirally wound strips oriented at about 0° to 5° with respect to the equatorial plane of the tire and extending substantially about the axial width of the belt structure, the spirally wound strips being reinforced by cords consisting at least in part of aramid yarns; and
  - (b) a ply interposed between each pair of neighboring layers of spirally wound strips extending over substantially the same width as said layers, said ply being reinforced with textile cords.
2. A belt structure as described in claim 1 characterized by the layers of the spirally wound strips being reinforced with cords consisting at least in part of aramid yarns, the aramid yarns having together a linear density of at least 5,000 denier, the fabric density of the cords being at least 12 EPI.
3. A belt structure as described in claim 1 characterized by strips reinforced with textile cords being disposed between the lateral edges of the radially in layer of spirally wound strips and the carcass plies.
4. A belt structure as described in claim 1 characterized by a ply being folded radially outwardly around the layers of the spirally wound strips, the layers extending substantially about the axial width defined by the folded ply.
5. A belt structure as described in claim 4 characterized by strips reinforced with textile cords being disposed between the lateral edges of the radially in as well as the radially outermost layers of spirally wound strips and the folded ply.
6. A belt structure as described in claim 5 characterized by the strips being reinforced with nylon cords forming an angle comprised between 0° and 70° with a plane parallel to the equatorial plane of the tire and intersecting the cords, and having a linear density of at least 840 denier and a fabric density of at least 20 EPI.
7. A belt structure as described in claim 4 characterized by a ply, reinforced with textile cords, being disposed between the radially in layer of spirally wound strips and the folded ply and extends at least around the lateral edges of the in layer of spirally wound strips.
8. A belt structure as described in claim 7 characterized by said ply reinforced with textile cords being folded radially outwardly around the layers of spirally wound strips so as to cover at least the lateral edges of all said layers.
9. A belt structure as described in claim 4 characterized by the lateral ends of the ply, folded around the layers of spirally wound strips, having an overlapping relationship.
10. A belt structure as described in claim 1 characterized by a plurality of the convolutions of the spirally wound strip of at least one layer having an abutting relationship.
11. A belt structure as described in claim 1 characterized by a plurality of the convolutions of the spirally wound strip of at least one layer having an overlapping relationship.
12. A pneumatic tire having a pair of substantially inextensible annular bead cores which are axially spaced apart with at least two carcass plies extending between the bead cores, each of the carcass plies comprising a plurality of reinforcement cords oriented at 75° to 90° with respect to the equatorial plane of the tire



Fig.3.

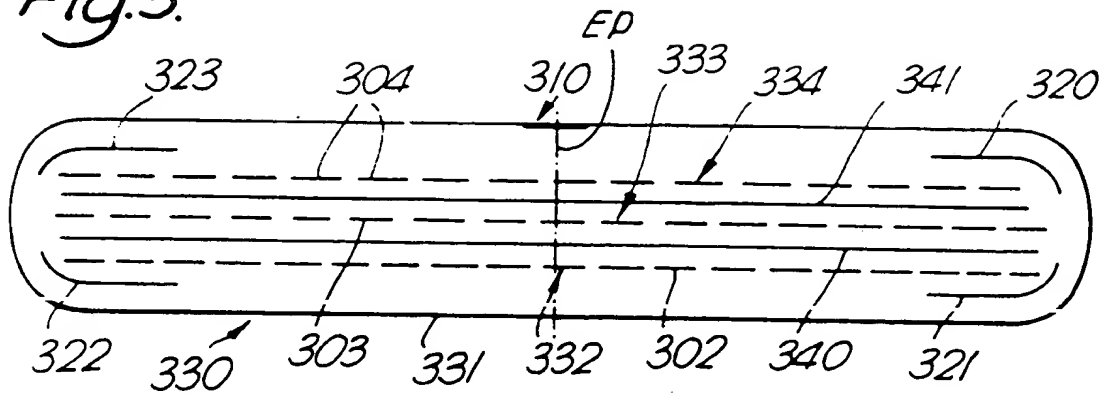


Fig.4.

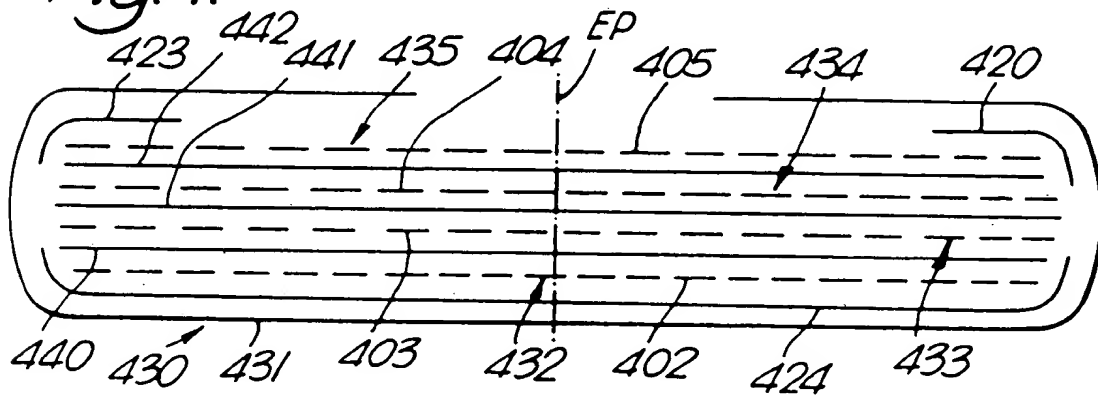


Fig.5.

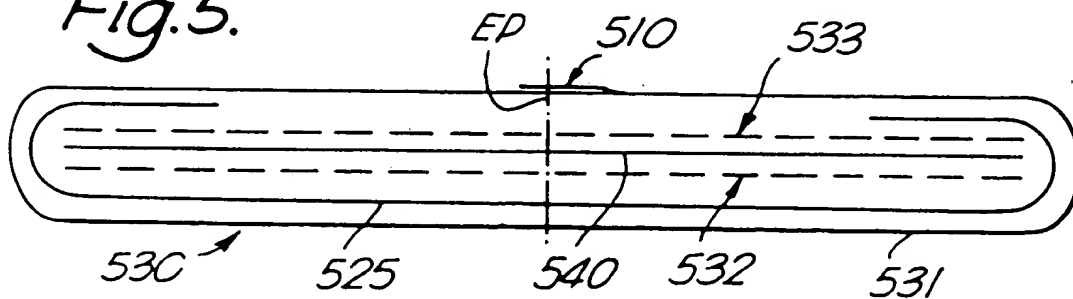




Fig.6.


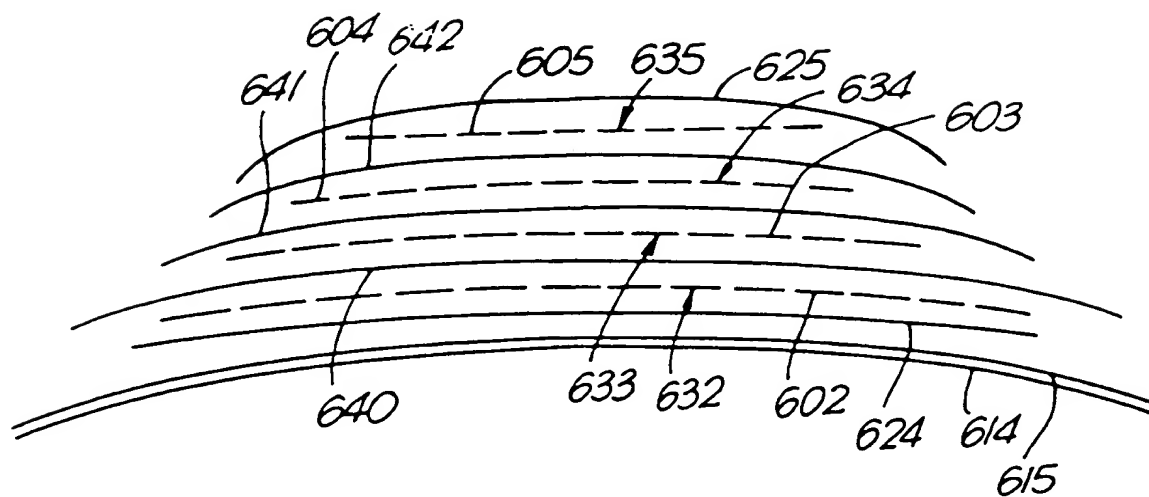


Fig.7.



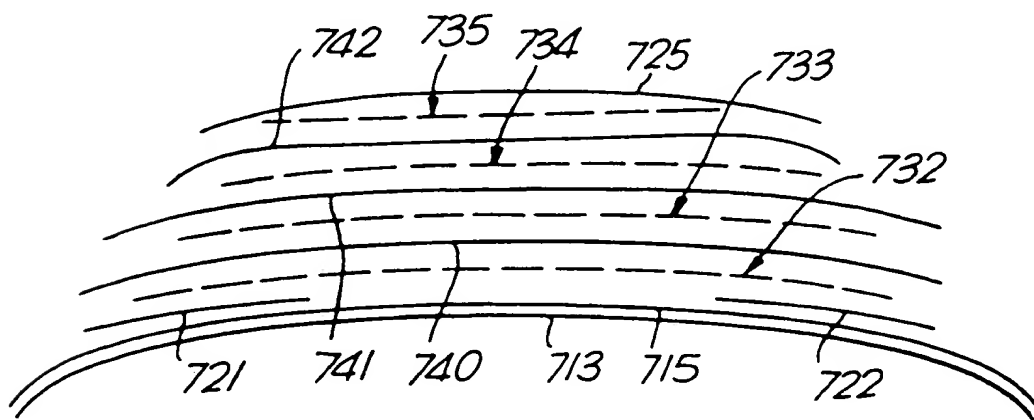

and at least one belt structure characterized by

- (a) at least two layers made of spirally wound strips, oriented at 0° to 5° with respect to the equatorial plane of the tire and extending substantially about the axial width of the belt structure, the spirally wound strips being reinforced by cords consisting at least in part of aramid yarns; and
- (b) a ply interposed between each pair of neighboring layers of spirally wound strips, extending over substantially the same width as said layers, said ply being reinforced with textile cords.

5

10

13. A pneumatic tire as described in claim 12 characterized by the layers of the spirally wound strips are reinforced with cords consisting at least in part of aramid yarns, the aramid yarns having together a linear density of at least 5.000 denier, the fabric density of the cords being at least 12 EPI.

15

20

14. A pneumatic tire as described in claim 12 characterized by a ply being folded radially outwardly around the layers of the spirally wound strips, the layers extending substantially about the axial width defined by the folded ply.

25

15. A pneumatic tire as described in claim 12 characterized by the reinforcement cords of the carcass plies comprising each a nylon monofilament having a linear density of at least 3000 denier.

30

35



40

45

50

55



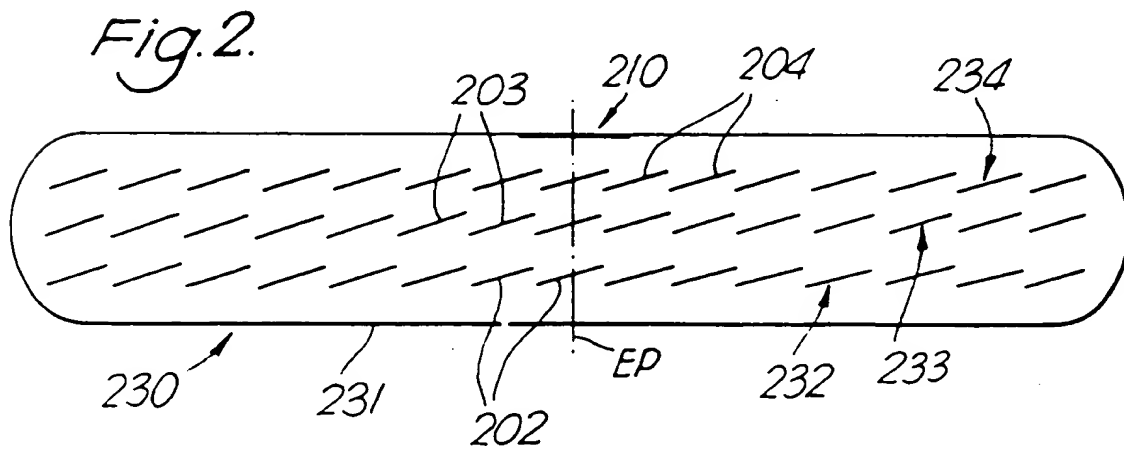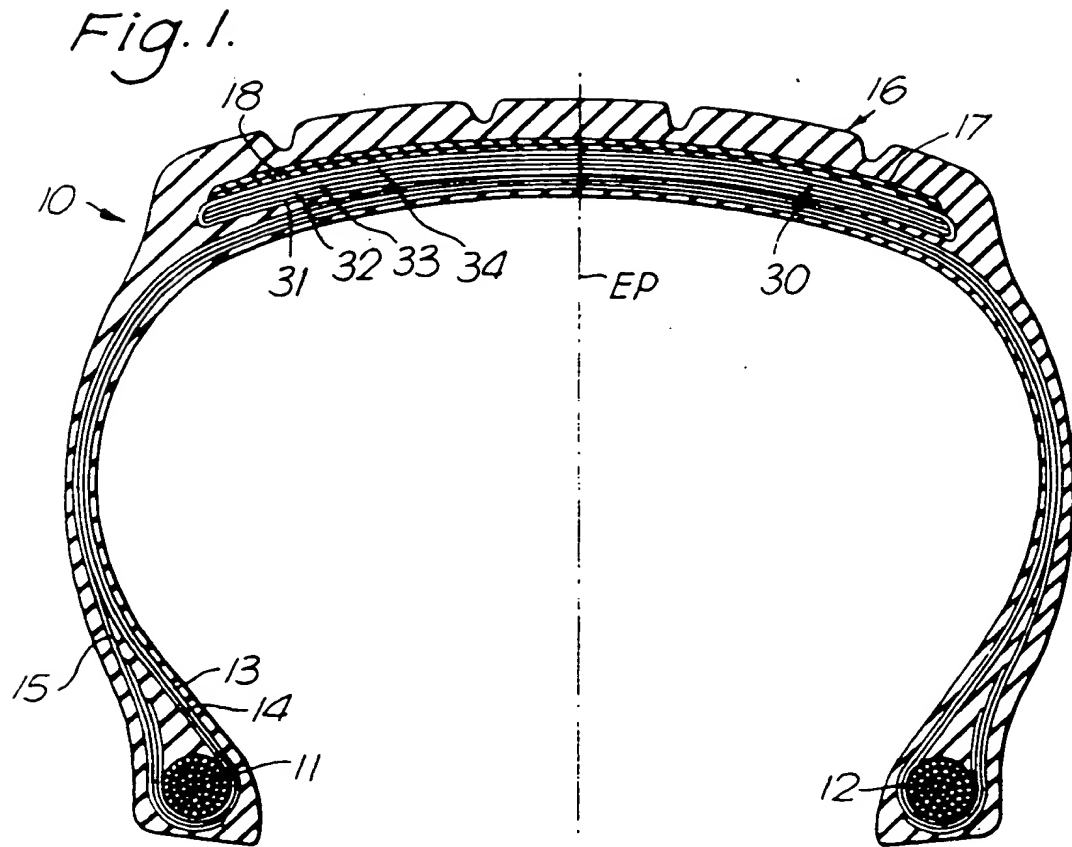

PRIOR ART





Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number:

**0 479 065 A3**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: **91116025.7**

(51) Int. Cl.<sup>5</sup>: **B60C 9/20, B60C 9/22,  
B60C 9/26**

(22) Date of filing: **20.09.91**

(30) Priority: **01.10.90 US 590999**

(43) Date of publication of application:  
**08.04.92 Bulletin 92/15**

(34) Designated Contracting States:  
**DE ES FR GB IT**

(46) Date of deferred publication of the search report:  
**09.09.92 Bulletin 92/37**

(71) Applicant: **THE GOODYEAR TIRE & RUBBER**

**COMPANY**  
**1144 East Market Street**  
**Akron, Ohio 44316-0001(US)**


(72) Inventor: **Navaux, Stanley**  
**49, Chaussee d'Arlon**  
**B-6650 Bastogne(BE)**

(74) Representative: **Leitz, Paul**  
**Goodyear Technical Center, Patent**  
**Department**  
**L-7750 Colmar-Berg(LU)**

(54) **Belt structure for a radial pneumatic tire.**

(57) A radial ply pneumatic tire (10) has carcass plies (13-15) reinforced by textile cords and folded axially around a pair of axially spaced bead cores (11,12) and a belt structure (30; 330) comprising at least two layers (32-34; 332-334) made of spirally wound strips. The spirally wound strips are reinforced by

cords consisting at least in part of aramid yarns. Between each pair of neighboring layers (332-334) of spirally wound strips, a ply (340,341) reinforced by textile cords is interposed. Such a belt structure is more specifically suitable for an aircraft tire.

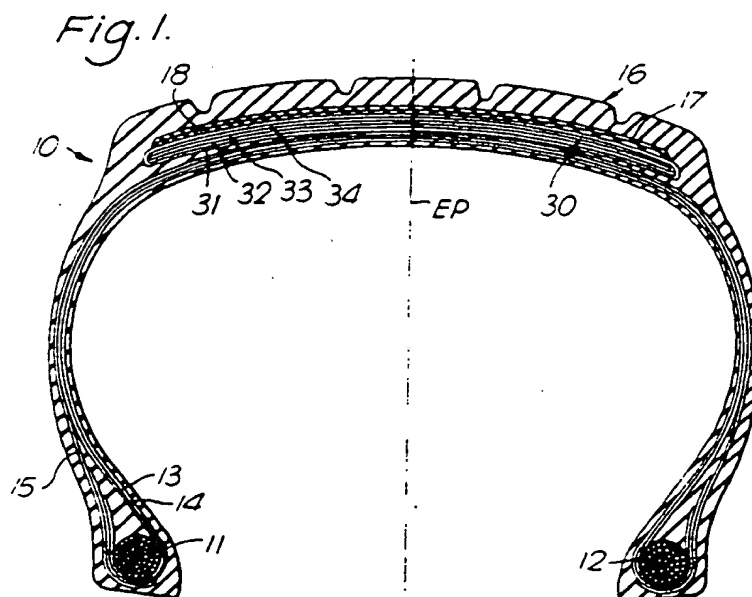

EP 0 479 065 A3





European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

EP 91 11 6025

| DOCUMENTS CONSIDERED TO BE RELEVANT   |   |   |   |
|---|---|---|---|
| Category  | Citation of document with indication, where appropriate, of relevant passages   | Relevant to claim   | CLASSIFICATION OF THE APPLICATION (Int. Cl.5) |
| P, X  | EP-A-0 400 859 (REIFENWERKE)<br>* column 2, line 5 - column 2, line 26 *<br>* column 3, line 55 - column 4, line 25 *<br>---          | 1, 3, 12  | 860C9/20<br>860C9/22<br>860C9/26              |
| A   | EP-A-0 364 291 (BRIDGESTONE)<br>* column 14, line 6 - column 17, line 44 *<br>---   | 1, 4, 12  |   |
| A   | US-A-4 832 101 (T. WELTER)<br>* column 2, line 32 - column 3, line 11 *<br>* column 5, line 63 - column 6, line 29; figure 1 *<br>--- | 1, 2, 4   |   |
| A   | EP-A-0 329 592 (GOODYEAR)<br>* page 5, line 50 - page 6, line 8; figure 1 *<br>---  | 1, 2, 3   |   |
| A   | EP-A-0 295 348 (BRIDGESTONE)<br>* column 11, line 40 - column 12, line 26 *<br>-----  | 1   |   |
|   |   |   | TECHNICAL FIELDS SEARCHED (Int. Cl.5)         |
|   |   |   | B60C  |
| The present search report has been drawn up for all claims  |   |   |   |
| Place of search<br>THE HAGUE  |   | Date of completion of the search<br>07 JULY 1992  | Examiner<br>SCHMITT L. P.                     |
| CATEGORY OF CITED DOCUMENTS   |   |   |   |
| X : particularly relevant if taken alone<br>Y : particularly relevant if combined with another document of the same category<br>A : technological background<br>O : non-written disclosure<br>P : intermediate document |   | T : theory or principle underlying the invention<br>E : earlier patent document, but published on, or after the filing date<br>D : document cited in the application<br>L : document cited for other reasons<br>---<br>& : member of the same patent family, corresponding document |   |